

## Typical Applications

Telecommunication  
 Universal Clock

## Features

5x7 ceramic oscillator  
 Enable Function

## Previous Vectron Model Numbers

AD; MCOS73

## Frequency range

1 MHz – 80 MHz

## Frequency stabilities<sup>1</sup>

Parameter	Min	Typ	Max.	Units	Operating temp range	Ordering Code <sup>5</sup>
overall tolerance (vs. Initial, vs. operating temperature range vs. Load vs. Supply, vs:1 year aging)	-100.0		+100.0	ppm	-0 ... +70°C	C104
	-50.0		+50.0	ppm	-0 ... +70°C	C505
	-25.0		+25.0	ppm	-0 ... +70°C	C255
	-100.0		+100.0	ppm	-40 ... +85°C	F104
	-50.0		+50.0	ppm	-40 ... +85°C	F505
	-32.0		+32.0	ppm	-40 ... +85°C	F325


## Supply voltage

Parameter	Min	Typ	Max.	Units	Condition	Ordering Code <sup>5</sup>
Supply voltage (Vs)	4.75	5.0	5.25	VDC		SV050
Current consumption			35	mA	fo < 20 MHz	
Current consumption			45	mA	fo < 80 MHz	
Supply voltage (Vs)	3.135	3.3	3.465	VDC		SV033
Current consumption			25	mA	fo < 20 MHz	
Current consumption			40	mA	fo < 80 MHz	

## RF output

Parameter	Min	Typ	Max.	Units	Condition	Ordering Code <sup>5</sup>
Signal		HCMOS				RFH
Load		15.0		pF		
Rise and Fall time			10	ns	@ 15 pF 10 to 90 %	
Duty cycle	40		60	%	@ Vs/2	


## Enclosure

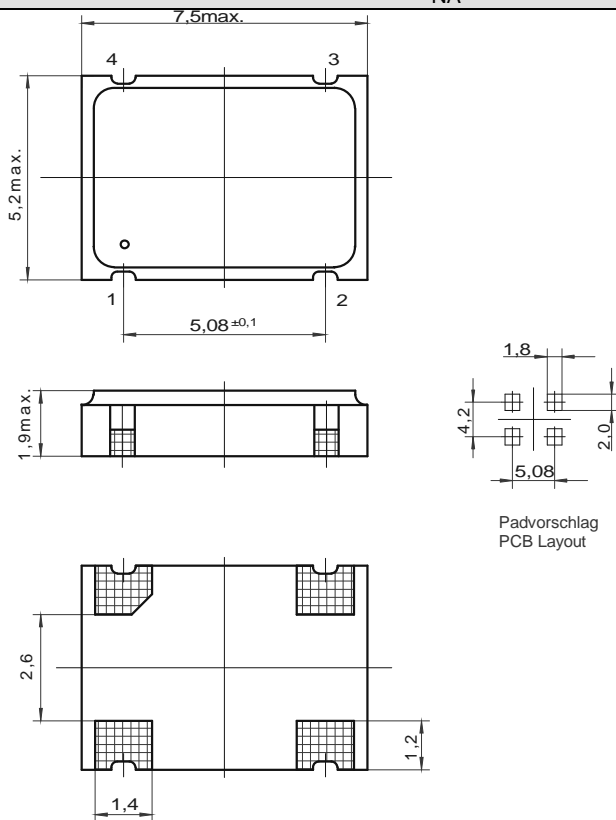Type A			
Package Codes:			
Code	Height "H"	Pin Length "L"	
A1	1,9	NA	
 <p style="text-align: right;">Dimensions: mm</p>			
Pin Connections			
1 NC / Tri-State Control 2 Ground (Case) 3 RF Output 4 Supply Voltage Input (Vs) Outline Drawing:	Option	Pin 1	Pin 3
	Enable	Tri State High Open Low	Output clock High resistance output
Marking			
C1259A1-xxxx frequency * C XYYWW			

## Absolute Maximum Ratings

Parameter	Min	Typ	Max.	Units	Condition
Supply voltage (Vs)			7	V	
Operable temperature range	-30		+80	°C	
Storage temperature range	-40		+90	°C	

## Standard Shipping Method

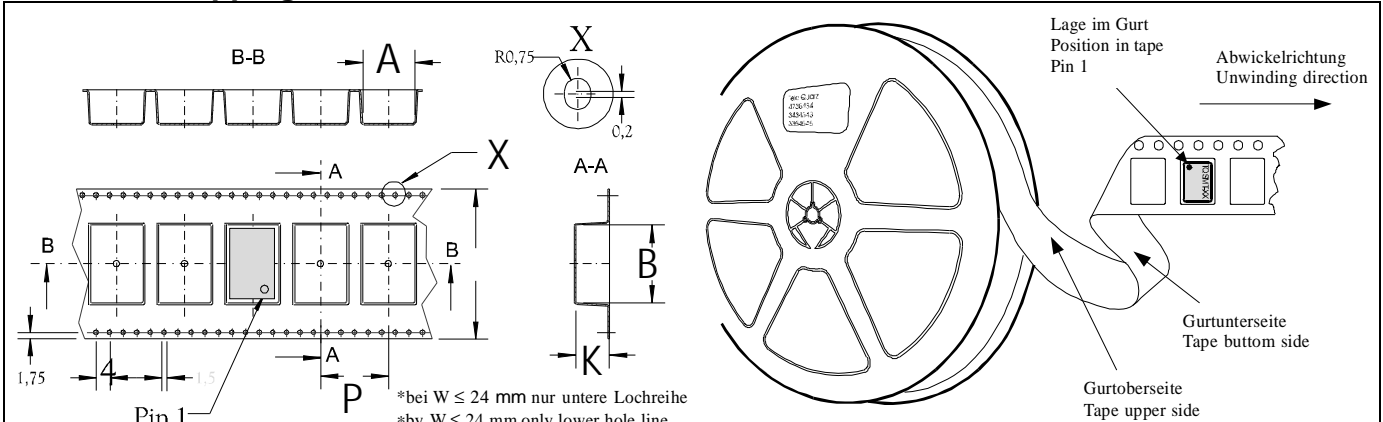


B-B    A    R0,75    X    0,2    A-A    B    K    Lage im Gurt Position in tape Pin 1    Abwickelrichtung Unwinding direction  
 A    X    B    B    A    P    \*bei W ≤ 24 mm nur untere Lochreihe \*by W ≤ 24 mm only lower hole line  
 1,75    4    1,5    Pin 1    Gurtunterseite Tape bottom side    Gurtoberseite Tape upper side

Production tolerance complying DIN IEC 286-3

Enclosure Type	Tape width W [mm]	Quantity per meter	Quantity per reel	Dimension P
Type A	16	125	1000	8

## Recommended Reflow Profile

standard-reflow-profile for SMD-oscillators

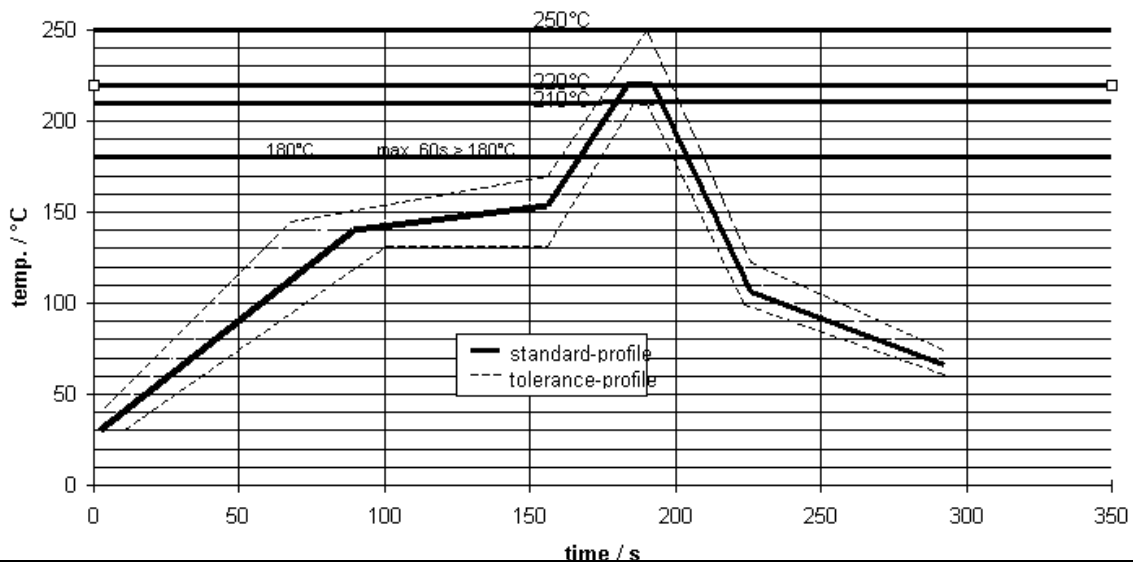

SMD oscillators must be on the top side of the PCB during the reflow process.

## How to Order this Product:

<b>Step 1</b>	Use this worksheet to forward the following information to your factory representative:				
	<b>Model</b>	<b>Stability Code</b>	<b>Supply Voltage Code</b>	<b>RF Output Code</b>	<b>Package Code</b>
	C1259				
<i>Example:</i>	C1259	C104	SV050	RFH	A1

<b>Step 2</b>	The factory representative will then respond with a Vectron Model Number in the following Configuration:			
	<b>Model</b>	<b>Package Code</b>	<b>Dash</b>	<b>Dash Number</b>
	C1259	[Customer Specified Package Code]	-	[Factory Generated 4 digit number]

*Typical P/N = C1259A1-0001*

### Notes:

- 1 Contact factory for improved stabilities or additional product options. Not all options and codes are available at all frequencies.
- 2 Unless otherwise stated all values are valid after warm-up time and refer to typical conditions for supply voltage, frequency control voltage, load, temperature (25°C)
- 3 Phase noise degrades with increasing output frequency.
- 4 Subject to technical modification.
- 5 Contact factory for availability.